

CITTA-
DECORATIVE
SERIES





LIGHT
AS AN EXPRESSION
OF LIFE


INDEX

4 - 5	AOSTA
6 - 7	ANCONA
8 - 9	BARI
10 - 11	CATANIA
12 - 13	CAMPOBASSO
14 - 15	FIRENZE
16 - 17	GENOVA
18 - 19	LAQUILA
20 - 21	MILANO
22 - 23	NAPOLI
24 - 25	PALERMO
26 - 27	PERUGIA
28 - 29	POTENZA
30 - 31	ROMA
32 - 33	TORINO
34 - 35	TRENTO
36 - 37	TRIESTE
38 - 39	VENEZIA
41	OFFICE



PRODUCT SPECIFICATIONS

	TL-AOS-45	TL-AOS-60	TL-AOS-75	TL-AOS-90	TL-AOS-120	TL-AOS-180	TL-AOS-300
Dimensions (mm)	Ø450 x 100	Ø600 x 100	Ø750 x 100	Ø900 x 100	Ø1200 x 100	Ø1800 x 100	Ø3000 x 100
Wattage	30W	40W	60W	72W	92W	140W	230W
Lumens	1500 lm	2310 lm	3180 lm	4179 lm	5087 lm	8120 lm	13340 lm
CRI	>80 or >90						
CCT	3000K / 4000K / 6000K						
Voltage	90-265VAC						
Frame	Aluminum + Optic Grade Opal PMMA diffuser						
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized						
LED	Samsung 2835						
Driver	MEAN WELL						
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable						
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)						

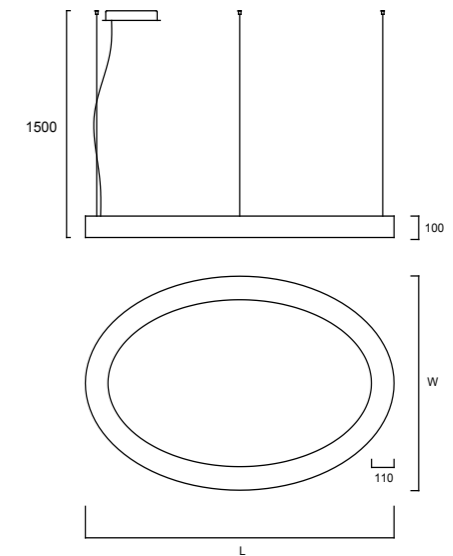



PRODUCT SPECIFICATIONS

	TL-ANC-120	TL-ANC-150
Dimensions (mm)	1200 x 800 x 100	1500 x 1000 x 100
Wattage	92W	140W
Lumens	4953 lm	7724 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	




PRODUCT SPECIFICATIONS

	TL-BAR-45	TL-BAR-60	TL-BAR-75	TL-BAR-90	TL-BAR-120
Dimensions (mm)	Ø450 x 100	Ø600 x 100	Ø750 x 100	Ø900 x 100	Ø1200 x 100
Wattage	40W	60W	72W	92W	140W
Lumens	3164 lm	4765 lm	6048 lm	9635 lm	12363 lm
CRI	>80 or >90				
CCT	3000K / 4000K / 6000K				
Voltage	90-265VAC				
Frame	Aluminum + Optic Grade Opal PMMA diffuser				
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized				
LED	Samsung 2835				
Driver	MEAN WELL				
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable				
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)				

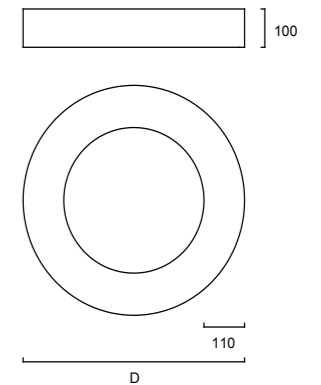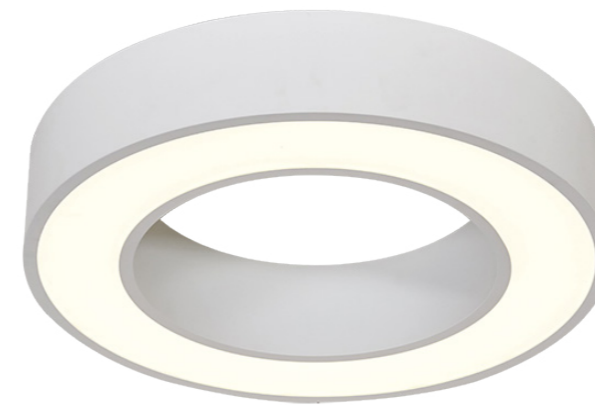



PRODUCT SPECIFICATIONS

	TL-CAT-45	TL-CAT-60	TL-CAT-75	TL-CAT-90	TL-CAT-120
Dimensions (mm)	Ø450 x 100	Ø600 x 100	Ø750 x 100	Ø900 x 100	Ø1200 x 100
Wattage	30W	40W	60W	72W	92W
Lumens	1500 lm	2310 lm	3180 lm	4179 lm	5087 lm
CRI	>80 or >90				
CCT	3000K / 4000K / 6000K				
Voltage	90-265VAC				
Frame	Aluminum + Optic Grade Opal PMMA diffuser				
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized				
LED	Samsung 2835				
Driver	MEAN WELL				
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable				
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)				

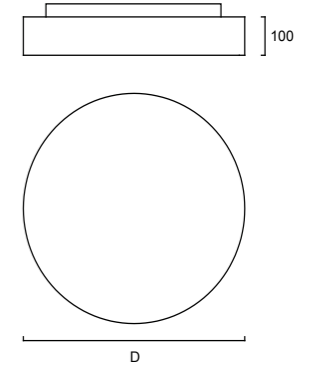


PRODUCT SPECIFICATIONS

	TL-CAM-45	TL-CAM-60	TL-CAM-75	TL-CAM-90	TL-CAM-120
Dimensions (mm)	Ø450 x 100	Ø600 x 100	Ø750 x 100	Ø900 x 100	Ø1200 x 100
Wattage	30W	40W	60W	72W	92W
Lumens	3164 lm	4765 lm	6048 lm	9635 lm	12363 lm
CRI	>80 or >90				
CCT	3000K / 4000K / 6000K				
Voltage	90-265VAC				
Frame	Aluminum + Optic Grade Opal PMMA diffuser				
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized				
LED	Samsung 2835				
Driver	MEAN WELL				
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable				
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)				

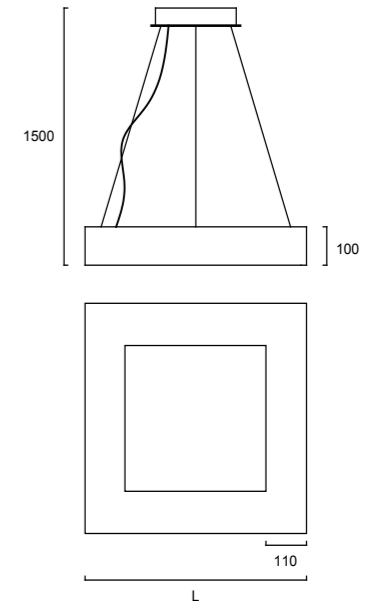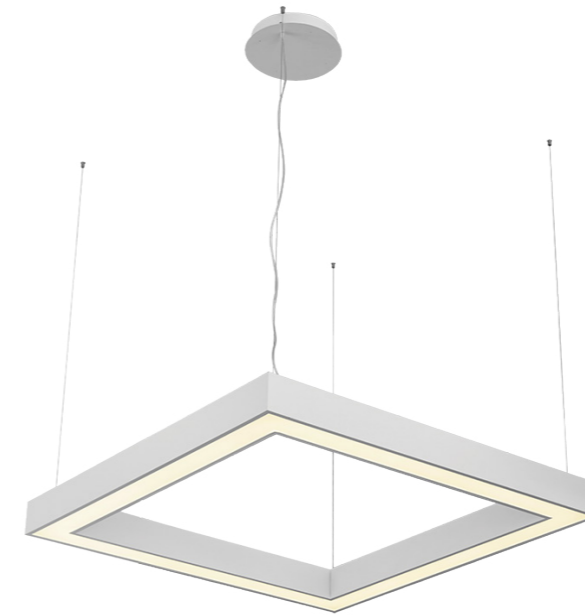


PRODUCT SPECIFICATIONS

	TL-FIR-85	TL-FIR-120
Dimensions (mm)	850 x 100	1200 x 100
Wattage	72W	142W
Lumens	4032 lm	7812 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	

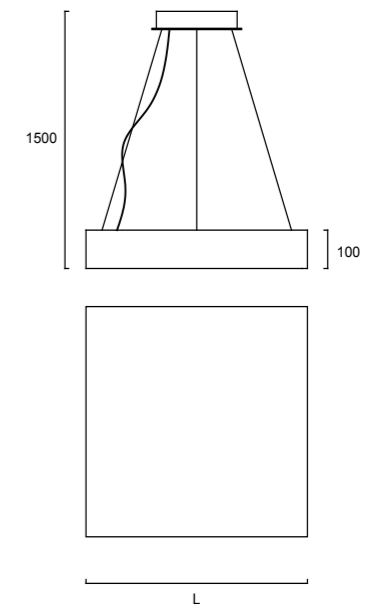


PRODUCT SPECIFICATIONS

	TL-GEN-75	TL-GEN-120
Dimensions (mm)	745 x 100	1200 x 100
Wattage	72W	142W
Lumens	6122 lm	12496 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	

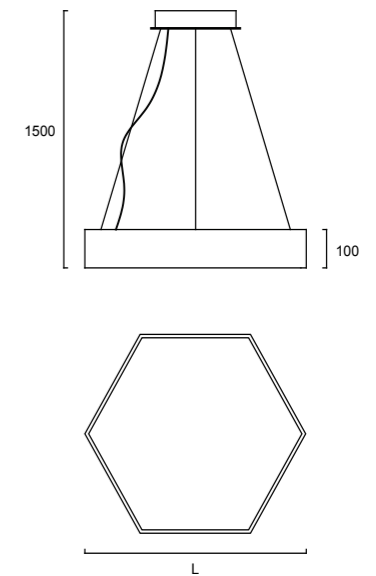



PRODUCT SPECIFICATIONS

	TL-LAQ-75	TL-LAQ-120
Dimensions (mm)	745 x 100	1200 x 100
Wattage	72W	142W
Lumens	6312 lm	12365 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	

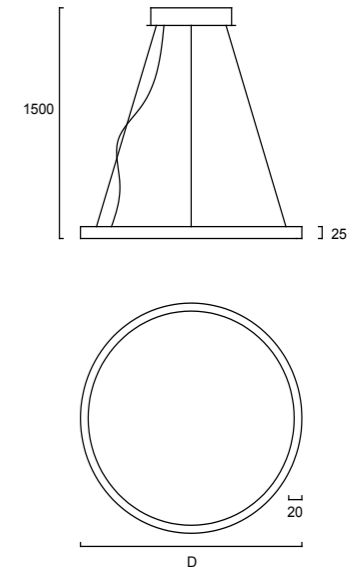


PRODUCT SPECIFICATIONS

	TL-MIL-45	TL-MIL-60	TL-MIL-80	TL-MIL-100	TL-MIL-120	TL-MIL-150
Dimensions (mm)	Ø450 x 25	Ø600 x 25	Ø800 x 100	Ø1000 x 100	Ø1200 x 100	Ø1500 x 100
Wattage	25W	35W	40W	50W	60W	72W
Lumens	1532 lm	2332 lm	2515 lm	3423 lm	4022 lm	4968 lm
CRI	>80 or >90					
CCT	3000K / 4000K / 6000K					
Voltage	90-265VAC					
Frame	Aluminum + Optic Grade Opal PMMA diffuser					
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized					
LED	Samsung 2835					
Driver	MEAN WELL					
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable					
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)					

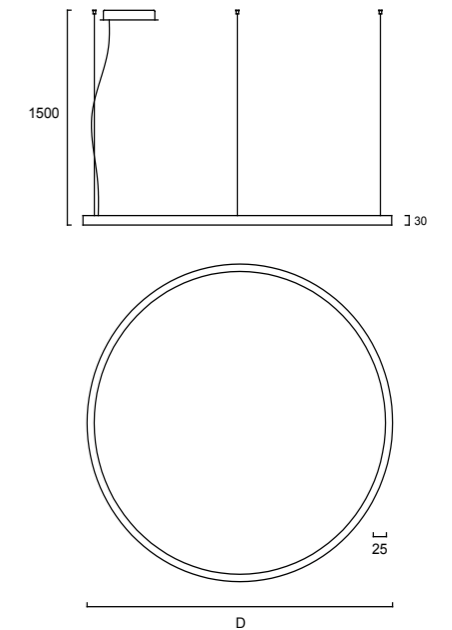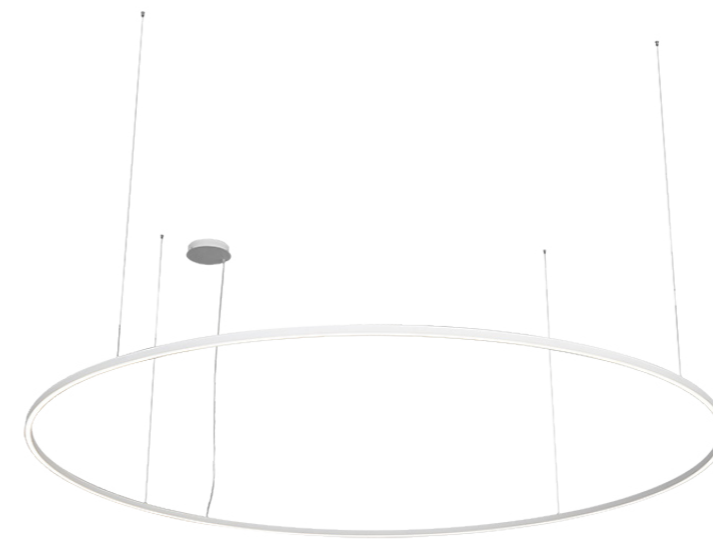

PRODUCT SPECIFICATIONS

	TL-NAP-200	TL-NAP-300
Dimensions (mm)	Ø2000 x 30	Ø3000 x 30
Wattage	92W	142W
Lumens	6442 lm	10082 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	

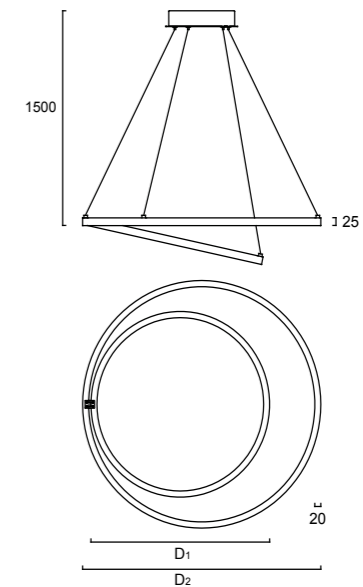

PRODUCT SPECIFICATIONS

	TL-PAL-45/60	TL-PAL-60/80	TL-PAL-80/100	TL-PAL-100/120
Dimensions (mm)	Ø450/600 x 25	Ø600/800 x 25	Ø800/1000 x 25	Ø1000/1200 x 25
Wattage	60W	72W	92W	112W
Lumens	3607 lm	4824 lm	6256 lm	7952 lm
CRI	>80 or >90			
CCT	3000K / 4000K / 6000K			
Voltage	90-265VAC			
Frame	Aluminum + Optic Grade Opal PMMA diffuser			
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized			
LED	Samsung 2835			
Driver	MEAN WELL			
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable			
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)			




PRODUCT SPECIFICATIONS

	TL-PER-45/60/80	TL-PER-80/100/120
Dimensions (mm)	Ø450/600/800 x 25	Ø800/1000/1200 x 25
Wattage	92W	142W
Lumens	6072 lm	9656 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	




The smallest ring is up and down light

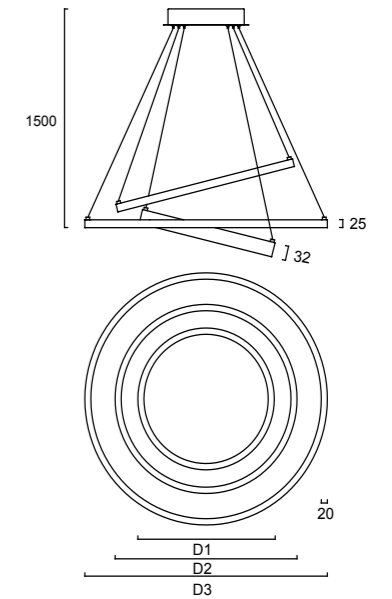


PRODUCT SPECIFICATIONS

	TL-POT-35/45/60	TL-POT-45/60/80	TL-POT-80/100/120
Dimensions (mm)	Ø350/450/600 x 25	Ø450/600/800 x 25	Ø800/1000/1200 x 25
Wattage	72W	92W	142W
Lumens	4752 lm	6164 lm	9723 lm
CRI	>80 or >90		
CCT	3000K / 4000K / 6000K		
Voltage	90-265VAC		
Frame	Aluminum + Optic Grade Opal PMMA diffuser		
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized		
LED	Samsung 2835		
Driver	MEAN WELL		
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable		
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)		

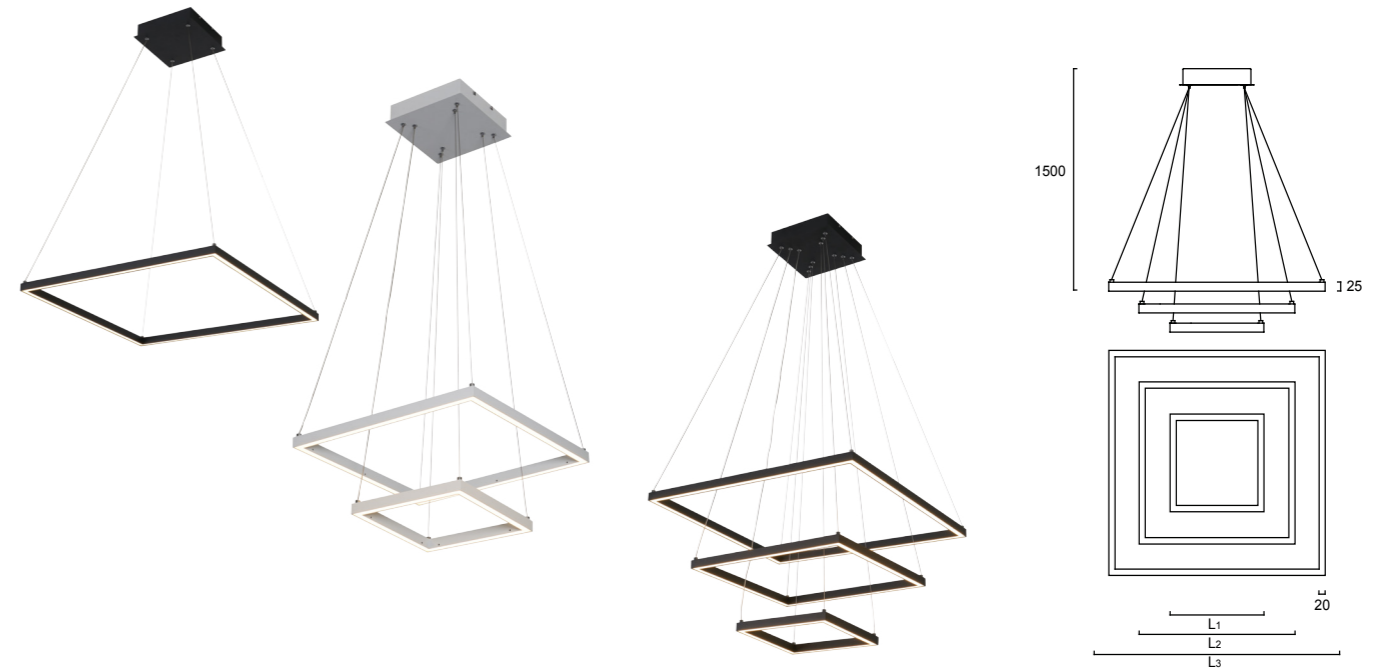


PRODUCT SPECIFICATIONS

	TL-ROM-70	TL-ROM-50/70	TL-ROM-30/50/70
Dimensions (mm)	705 x 25	508/705 x 25	305/508/705 x 25
Wattage	40W	72W	92W
Lumens	2612 lm	4032 lm	6118 lm
CRI	>80 or >90		
CCT	3000K / 4000K / 6000K		
Voltage	90-265VAC		
Frame	Aluminum + Optic Grade Opal PMMA diffuser		
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized		
LED	Samsung 2835		
Driver	MEAN WELL		
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable		
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)		

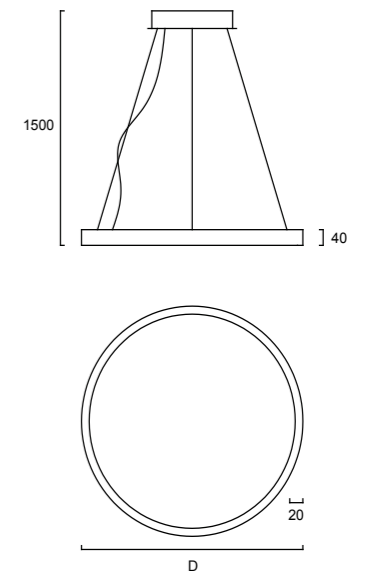


PRODUCT SPECIFICATIONS

	TL-TOR-60 (up & down light)	TL-TOR-80 (up & down light)	TL-TOR-100 (up & down light)	TL-TOR-120 (up & down light)
Dimensions (mm)	Ø600 x 40	Ø800 x 40	Ø1000 x 40	Ø1200 x 40
Wattage	40W	60W	72W	92W
Lumens	2442 lm	3921 lm	4823 lm	6164 lm
CRI	>80 or >90			
CCT	3000K / 4000K / 6000K			
Voltage	90-265VAC			
Frame	Aluminum + Optic Grade Opal PMMA diffuser			
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized			
LED	Samsung 2835			
Driver	MEAN WELL			
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable			
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)			

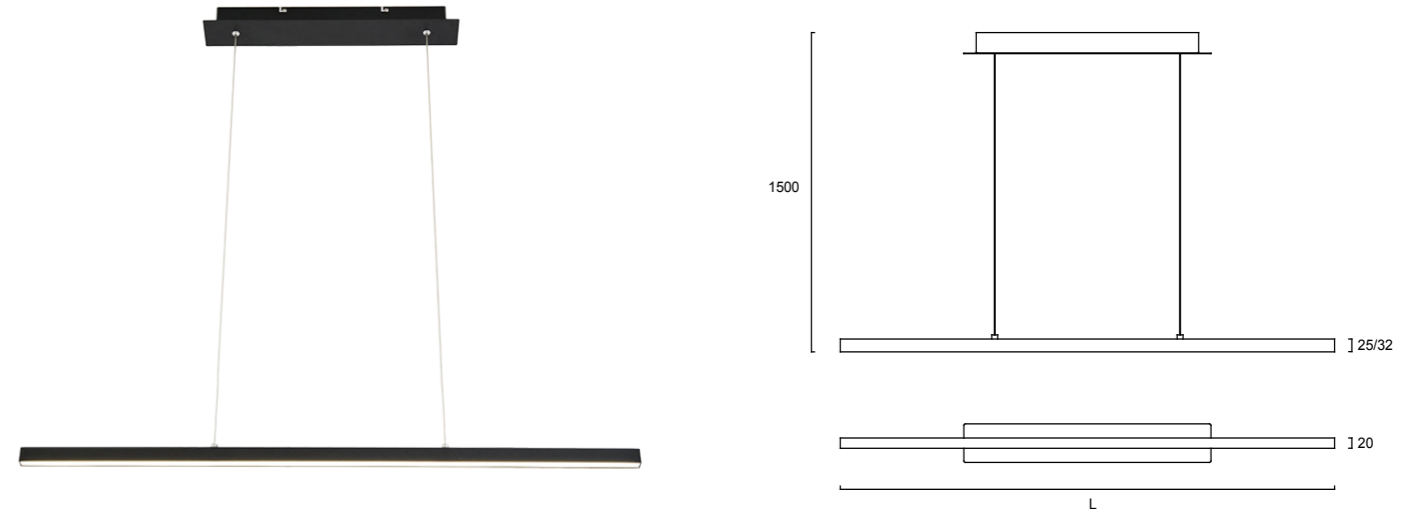


PRODUCT SPECIFICATIONS

	TL-TRN-100	TL-TRN-160	TL-TRN-100 (up & down light)	TL-TRN-160UD (up & down light)
Dimensions (mm)	1000 x 25	1600 x 25	1000 x 32	1600 x 32
Wattage	25W	40W	40W	60W
Lumens	1625 lm	2612 lm	2732 lm	4023 lm
CRI	>80 or >90			
CCT	3000K / 4000K / 6000K			
Voltage	90-265VAC			
Frame	Aluminum + Optic Grade Opal PMMA diffuser			
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized			
LED	Samsung 2835			
Driver	MEAN WELL			
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable			
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)			

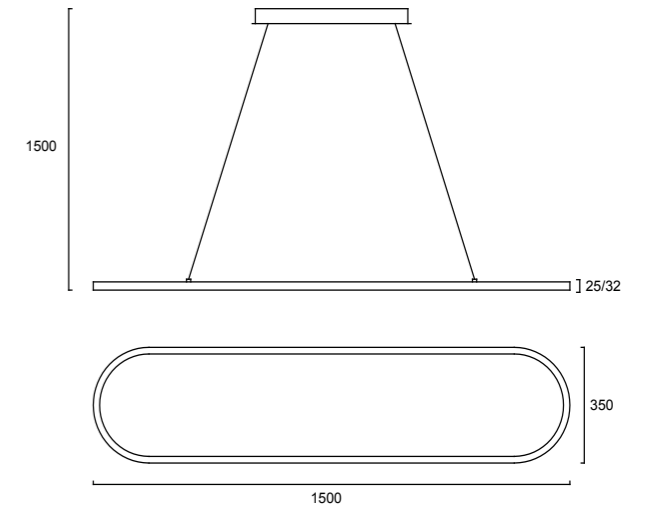

PRODUCT SPECIFICATIONS

	TL-TRI-150	TL-TRI-150UD (up & down light)
Dimensions (mm)	1500 x 350 x 25	1500 x 350 x 32
Wattage	60W	92W
Lumens	4023 lm	6178 lm
CRI	>80 or >90	
CCT	3000K / 4000K / 6000K	
Voltage	90-265VAC	
Frame	Aluminum + Optic Grade Opal PMMA diffuser	
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized	
LED	Samsung 2835	
Driver	MEAN WELL	
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable	
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)	

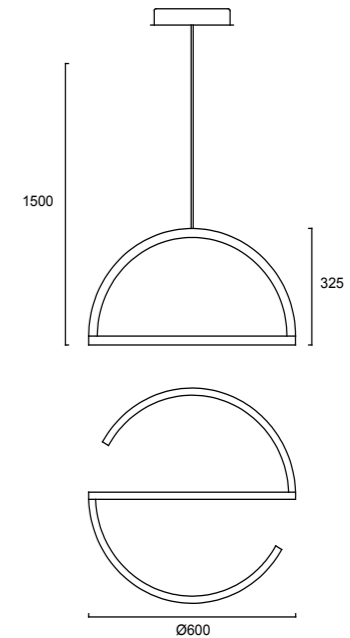

PRODUCT SPECIFICATIONS

	TL-VEN-60
Dimensions (mm)	600 x 325
Wattage	60W
Lumens	3216 lm
CRI	>80 or >90
CCT	3000K / 4000K / 6000K
Voltage	90-265VAC
Frame	Aluminum + Optic Grade Opal PMMA diffuser
Suspension Cable	1.5 M Lengths (standard), Other lengths can be customized
LED	Samsung 2835
Driver	MEAN WELL
Dimming Option	Non Dimmable, Triac Dimmable, 0-10V/PWM Dimmable, DALI/PUSH Dimmable
Finish Option	Matte White(RAL 9016), Matte Black(RAL 9017), Matte Silver(RAL 9007)



OFFICES

EUROPE

T-Luce Italia srl
Viale Giacomo Matteotti 15, Firenze 50121, Italy

europa@t-luce.com
+39 3281425503

MIDDLE EAST

Tecno Hub 2, 2nd floor Office 212,
Dubai, Silicon Oasis (UAE)

middleeast@t-luce.com
+971 526627708

ASIA

2263 Pasong Tamo Extension,
Magallanes, Makati City

asia@t-luce.com
+632 8893 2403

T-Luce Italia srl
Viale Giacomo Matteotti 15, Firenze 50121 **Italy**

info@t-luce.com
+39 3281425503