

MAGNETIC LIGHTS



info@t-luce.com
www.t-luce.com

IMPORTED & DISTRUBUTED BY:

T-Luce Italia srl
Viale Giacomo Matteotti 15 - Firenze 50121



ENTERPRISE CULTURE

ENTERPRISE MISSION

Design and manufacture perfect LED lamps
to improve human being's environment

ENTERPRISE FORECAST

To be a leading LED commercial lighting enterprise
satisfying customers' demand in market orientation

CORE VALUE

Customer first, sincerity, responsibility and innovation

ENTERPRISE SPIRIT

Confidence, teamwork, responsibility and tolerance

BUSINESS PHILOSOPHY

Honesty, practice and efficiency

STRATEGY CORE

Quality First, Innovation and Breakthrough

CUSTOMER SERVICE PHILOSOPHY

To be customers' reliable partne




PRODUCT DESCRIPTION:


Magnetic light is a kind of track light which is designed by using magnet's fast adsorption characteristic. It consists of two parts: track magnet and light. The track has four ways: surface mounted, recessed, borderless embedded installation, suspension. The light consists of anti-glare line light, anti-glare high power light, soft light lamp, suspension light and decorative lamp. The light can be used alone or assembled at will. Lighting effect can achieve point, line, surface combination, not only to meet the needs of various lighting effects, but also convenient installation, fashionable style, can greatly enhance the decorative effect, in line with the modern architectural design concept, is a fashionable, high-end LED lights leading the trend in the future, is the ideal choice of office, exhibition hall, exclusive stores, hotels, villas, clubs and other places.



Version 3.0 track




Surface mounted
Recessed
Suspended




Recessed with wing


Version 4.0 track



Surface mounted
Suspended



Recessed with wing



Recessed with
high wing

VERSION 4.0 TRACK

Installs Way: Recessed with wings / Surface mounted
Recessed with high wings / Suspension

Length: 0.5M / 1M / 1.5M / 2M


Colour: Sand white / Sand black

Material: Aluminum


Output Voltage: 48V DC

Maximum load current: 16A



Track maximum load power: 768W track longest 40m

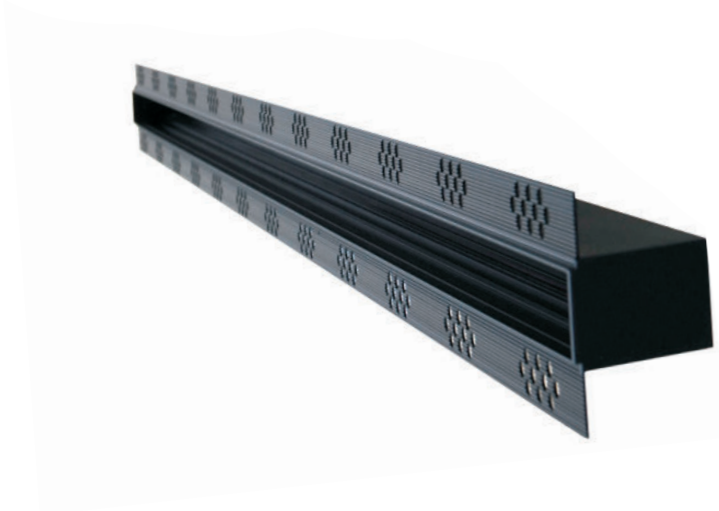

**VERSION 4.0 RECESSED
TRACK WITH WING**

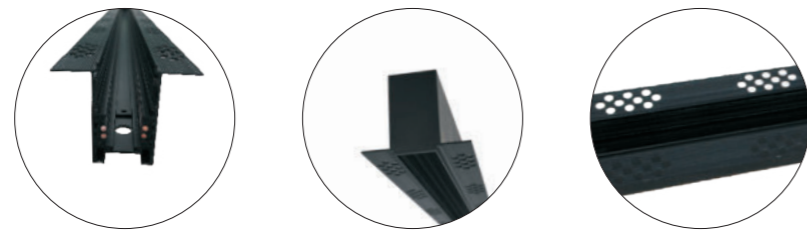


PRODUCT INFORMATION

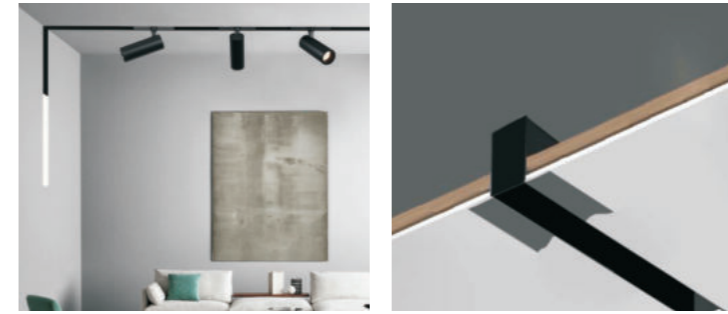


Track mode : TL-SRC500A / TL-SRC1000A / TL-SRC1500A / TL-SRC2000A
 Track length: 0.5m / 1.0m / 1.5m / 2.0m
 Cut out/mm: 505x35x55 / 1005x35x55 / 1505x35x55 / 2005x35x55
 Material: Aluminium
 Colour: Sand white/Sand black
 Input Voltage: DC48V

ACCESSORIES



Model: TL-STC9006
L type horizontal track connector with wing




Model: TL-STC9007
L type inner vertical track connector with wing



Model: TL-STC9008
L type outer vertical track connector with wing




Model: TL-STC9009
T type horizontal track connector with wing




Model: TL-STC90010
+ type horizontal track connector with wing



**VERSION 4.0 RECESSED
TRACK WITH HIGH WING**

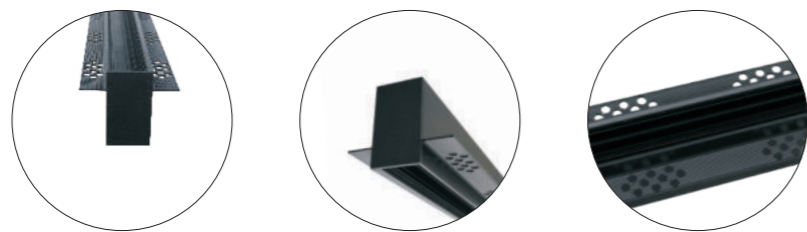


PRODUCT INFORMATION



Track mode: TL-SRC500B / TL-SRC1000B / TL-SRC1500B / TL-SRC2000B
 Track length: 0.5m / 1.0m / 1.5m / 2.0m
 Cut out/mm: 5 05x35x45 / 1 005x35x45 / 1 505x35x45 x 2 005x35x45
 Material: Aluminium
 Colour: Sand white/Sand black
 Input Voltage: D C 48V

ACCESSORIES

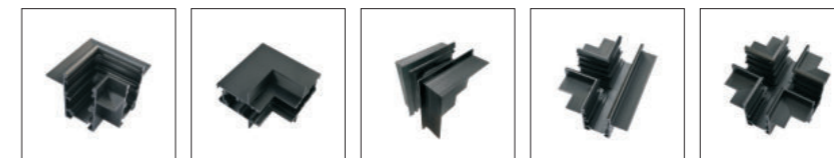

Model: TL-STC9011
L type horizontal track connector with high wing

Model: TL-STC9012
L type inner vertical track connector with high wing


Model: TL-STC9013
L type outer vertical track connector with high wing

Model: TL-STC9014
T type horizontal track connector with high wing

Model: TL-STC90015
+ type horizontal track connector with high wing



VERSION 4.0 PENDENT TRACK



PRODUCT INFORMATION




Track mode: TL-SSR500 / TL-SSR1000 / TL-SSR1500 / TL-SSR2000
 Track length: 0.5m / 1.0m / 1.5m / 2.0m
 Material: Aluminium
 Colour: Sand white/Sand black
 Input Voltage: DC48V

ACCESSORIES



Model: TL-STC9001
Trimless L type horizontal track connector




Model: TL-STC9002
Trimless L type inner vertical track connector



Model: TL-STC9003
Trimless L type outer vertical track connector




Model: TL-STC9004
Trimless T type horizontal track connector





Model: TL-STC9005
Trimless + type horizontal track connector



VERSION 4.0 SURFACE MOUNTED TRACK



PRODUCT INFORMATION

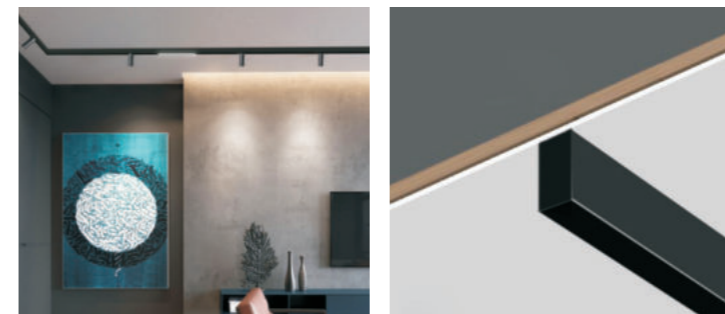


Track mode: TL-SSM500 / TL-SSM1000 / TL-SSM1500 / TL-SSM2000
 Track length: 0.5m / 1.0m / 1.5m / 2.0m
 Material: Aluminium
 Colour: Sand white / Sand black
 Input Voltage: DC48V

ACCESSORIES



Model: TL-STC90 01
Trimless L type horizontal track connector



Model: TL-STC90 02
Trimless L type inner vertical track connector



Model: TL-STC90 03
Trimless L type outer vertical track connector



Model: TL-STC90 04
Trimless T type horizontal track connector




Model: TL-STC900 05
Trimless + type horizontal track connector



**VERSION 4.0 MAGNETIC TRACK
LINEAR LIGHT SERIES**



PRODUCT INFORMATION

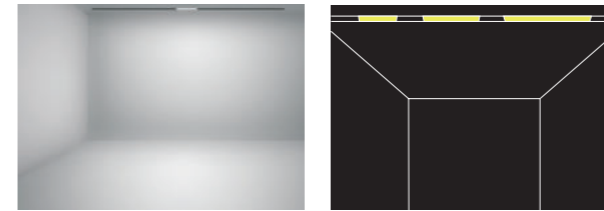

Item NO. : TL-SMLL3007
Power: 7W
Luminous Flux: 474lm
Size(mm): L 294*W22*H43



Item NO. : TL-SMLL6015
Power: 15W
Luminous Flux: 1020lm
Size(mm): L 574*W22*H43




Item NO. : TL-SMLL9022
Power: 22W
Luminous Flux: 1518lm
Size(mm): L 854*W22*H43




Item NO. : TL-SMLL12030
Power: 30W
Luminous Flux: 2043lm
Size(mm): L 1134*W22*H43


Beam Angle: 110°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 48V
Dim: 0-10V/Wi-Fi/Dali Dimmable

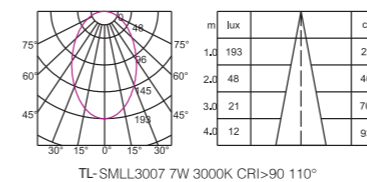


TL-SMLL3007 7W 3000K CRI>90 110°

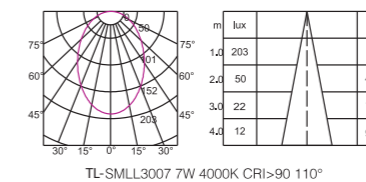


TL-SMLL3007 7W 4000K CRI>90 110°

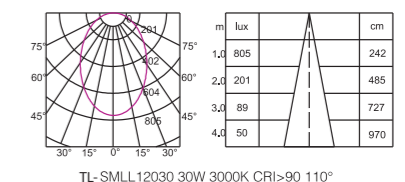


TL-SMLL12030 30W 3000K CRI>90 110°

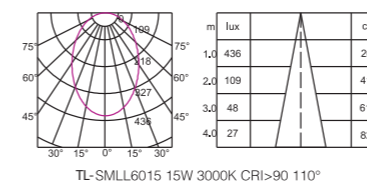

TL-SMLL6015 15W 3000K CRI>90 110°

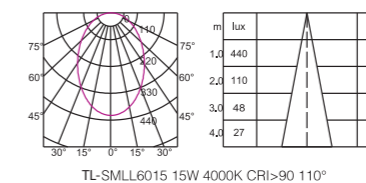


TL-SMLL6015 15W 4000K CRI>90 110°

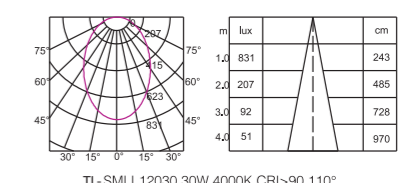

TL-SMLL12030 30W 4000K CRI>90 110°



PRODUCT INFORMATION

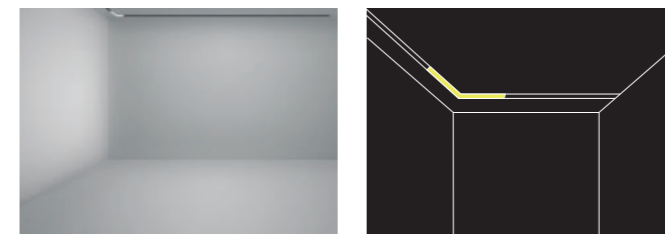

**VERSION 4.0 MAGNETIC TRACK
RIGHT-ANGLE LINEAR FLOOD LIGHT SERIES**



Item NO.: TL-SMLL3015
 Power: 15W
 Luminous Flux: 948lm
 Size(mm): L294*L294

Beam Angle: 110°
 Light Source: OSRAM SMD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white/Sand black
 CRI: >90
 Material: Aluminium
 Input Voltage: DC 48V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable







**VERSION 4.0 MAGNETIC TRACK
LINEAR SPOTLIGHT SERIES**







PRODUCT INFORMATION



Item NO.: TL-SMLS0606/SMLS0612
 Power: 6*1W/6*2W
 Luminous Flux: 426lm/864lm
 Size(mm): L 154*W22*H43

Beam Angle: 15°/ 28°/ 41°(6*1W/12*1W)
 13°/ 30°/ 45°(6*2W/12*2W)
 Light Source: OSRAM SMD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white/Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 48V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable

Item NO.: TL-SMLS1212/SMLS1224
 Power: 12*1W/12*2W
 Luminous Flux: 872lm/1655lm
 Size(mm): L 294*W22*H43

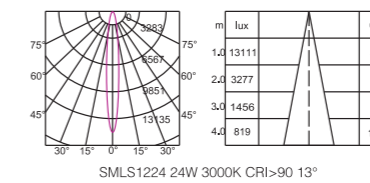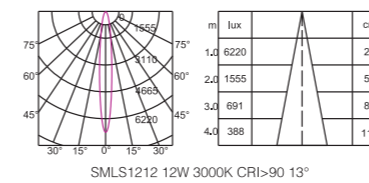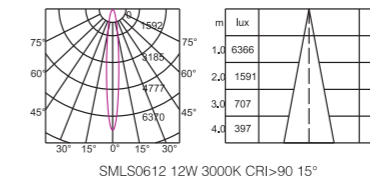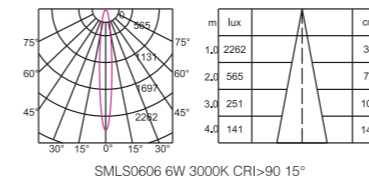

NEW



**VERSION 4.0 MAGNETIC TRACK
WALL WASHER SPOTLIGHT SERIES**



PRODUCT INFORMATION



Item NO. : TL-SMLS0606W/SMLS0612W
 Power: 6*1W/6*2W
 Luminous Flux: 360lm/715lm
 Size(mm): L154*W22*H43

Beam Angle: Wall washer
 Light Source: OSRAMS MD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: S and white/S and black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 48V
 Dim: 0-10V/Wi-Fi/Dali Dimmable

Item NO. : TL-SMLS1212W/SMLS1224W
 Power: 12*1W/12*2W
 Luminous Flux : 710lm/1430lm
 Size(mm): L294*W22*H43






**VERSION 4.0 MAGNETIC TRACK
GIMBAL LINEAR LIGHT SERIES**



PRODUCT INFORMATION

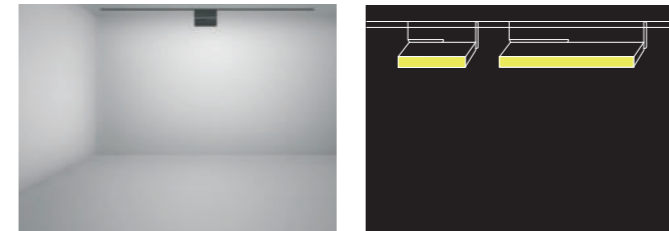


Item NO. : TL-SMGL1505
Power: 5W
Luminous Flux: 345lm
Size(mm): L154*W22*H43


Beam Angle: 110°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 48V
Dim: 0 - 10V/Wi - Fi/Dali Dimmable




Item NO. : TL-SMGL3007
Power: 7W
Luminous Flux: 483lm
Size(mm): L294*W22*H43

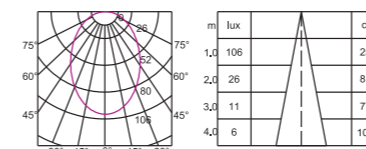


TL-SMGL1505 5W 3000K CRI>90 110°

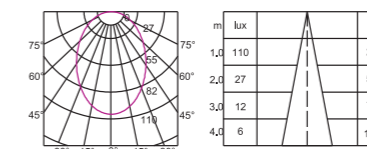

TL-SMGL1505 5W 4000K CRI>90 110°

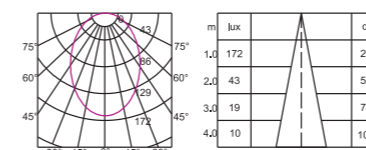

TL-SMGL3007 7W 3000K CRI>90 110°

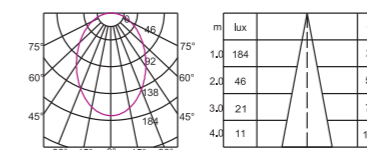


TL-SMGL3007 7W 4000K CRI>90 110°



**VERSION 4.0 MAGNETIC TRACK
GIMBAL SPOTLIGHT SERIES**



PRODUCT INFORMATION




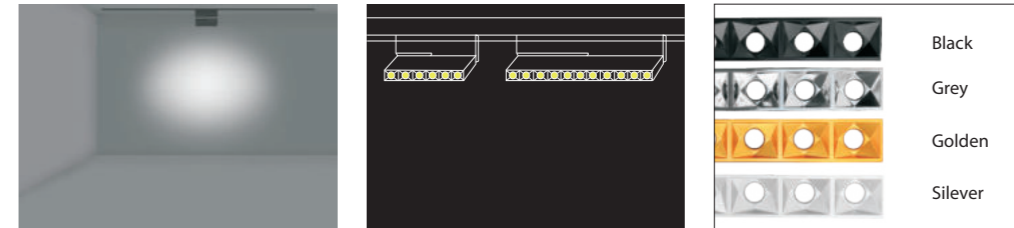


Item NO.: TL-SMGS0606/TL-SMGS0612
 Power: 6*1W/6*2W
 Luminous Flux: 414lm/853lm
 Size(mm): L154*W22*H104

Beam Angle: 15°/ 28°/ 41°(6*1W/12*1W)
 13°/ 30°/ 45°(6*2W/12*2W)
 Light Source: OSRAM SMD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: S and white/Sand black
 CRI: > 90
 Material: A aluminium
 Input Voltage: D C 48V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable



Item NO.: TL-SMGS1212/TL-SMGS1224
 Power: 12*1W/12*2W
 Luminous Flux: 871lm/1645lm
 Size(mm): L294*W22*H104

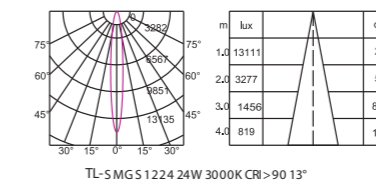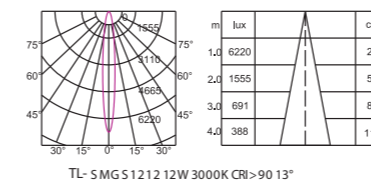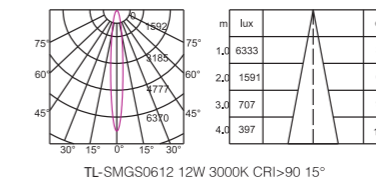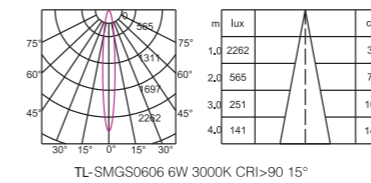




VERSION 4.0 MAGNETIC TRACK SPOTLIGHT SERIES









PRODUCT INFORMATION

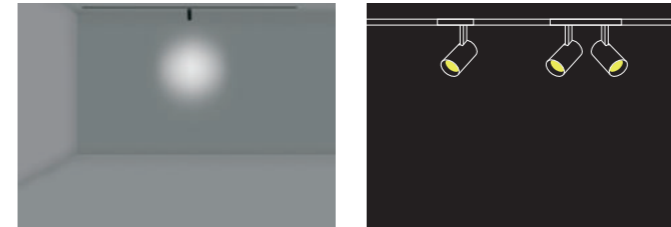

Item NO.: S MS 4005/SMS 4008
 Power: 5 W/8W
 Luminous F lux: 4 88lm/565lm
 Size (mm): L 76*D40*H93
 L 101*D40*H93

Beam Angle: 15°/ 24°/ 36°
 Light Source: C ITIZEN
 Colour Temperature: 2 700K/3000K/4000K/5000K
 Colour: S and white / S and black
 CRI: > 90
 Material: A luminium
 Input Voltage: D C 48V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable

Item NO.: S MS 4010/SMS 4016
 Power: 10W/16W
 Luminous F lux: 8 53lm/1376lm
 Size (mm): L 76*D40*H93
 L 101*D40*H93

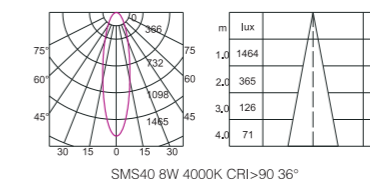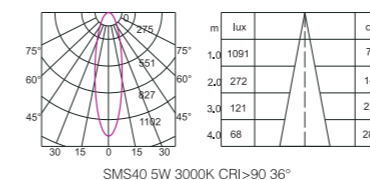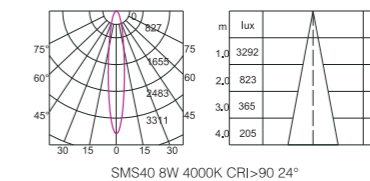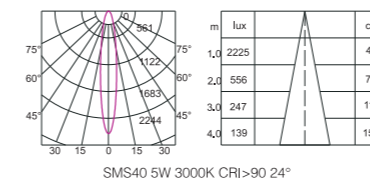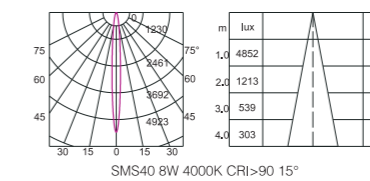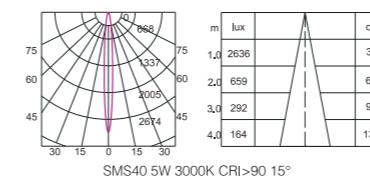



**VERSION 4.0 RECESSED
SPOTLIGHT SERIES**





PRODUCT INFORMATION



Item NO. :TL-SMS5508/TL-SMS5515
 Power: 8W/15W
 Luminous Flux: 678lm/1278lm
 Size(mm): L 105*D55*H142
 L 170*D55*H142



Beam Angle: 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 48V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable

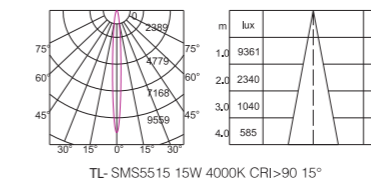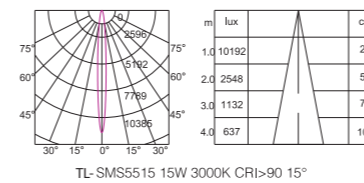



VERSION 4.0 RECESSED SPOTLIGHT SERIES




PRODUCT INFORMATION




Item NO. : TL-SMS5415
 Power: 15W
 Luminous Flux: 1 281lm
 Size(mm): L 125*D171*H148

Beam Angle: 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2 700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 48V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable

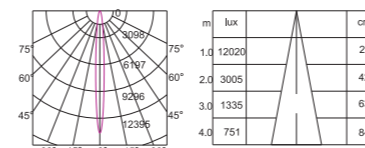

TL-SMS5415 15W 3000K CRI>90 15°

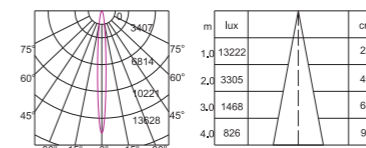


TL-SMS5415 15W 4000K CRI>90 15°



**VERSION 4.0 MAGNETIC TRACK
SUSPENDED LIGHT SERIES**




PRODUCT INFORMATION

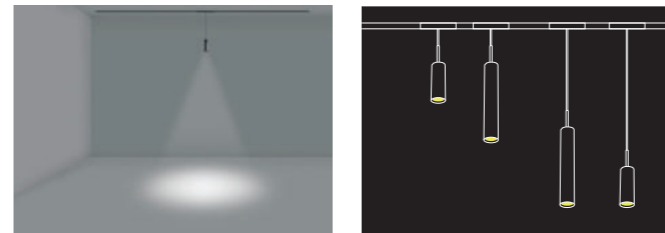


Item NO. : TL-SMP5508 / TL-SMP5515
 Power: 8W / 15W
 Luminous Flux: 688lm / 1275lm
 Size (mm): L300*D55

Beam Angle: 15° / 24° / 36°
 Light Source: CITIZEN
 Colour Temperature : 2700K / 3000K / 4000K / 5000K
 Colour: Sand white / Sand black
 CRI : > 90
 Material: Aluminium
 Input Voltage: D C 48V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable


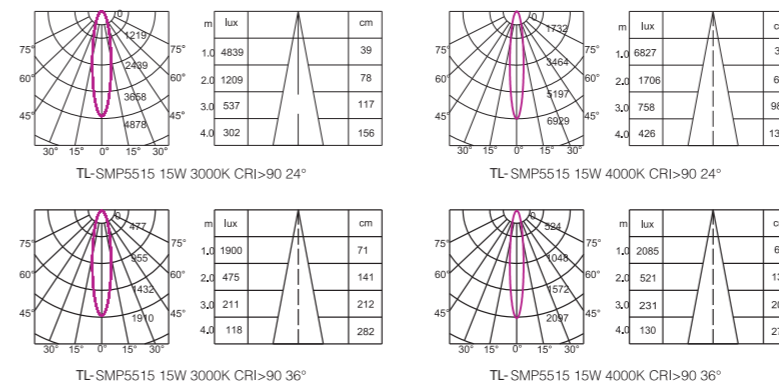




**VERSION 4.0 MAGNETIC TRACK
METEORITE DECORATIVE CHANDELIER**

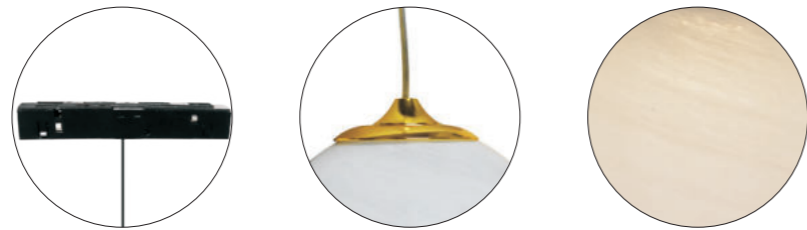


PRODUCT INFORMATION



Item NO. : TL-SMP13006
Power: 6W
Luminous Flux: 300lm
Size(mm): L130

Beam Angle: 15°/ 24°/ 36°
Light Source: CITIZEN
Colour Temperature: 2700K/3000K/4000K/5000K
CRI: > 90
Material: Glass made of special material
Input Voltage: DC48V
Dim: 0 - 10V/Wi - Fi/Dali Dimmable







**VERSION 4.0 MAGNETIC TRACK
PEARL DECORATIVE CHANDELIER**




PRODUCT INFORMATION



Item NO.: TL-SMP8005
Power: 5W
Luminous Flux: 300lm
Size(mm): D80

Beam Angle: 15° / 24° / 36°
Light Source: CITIZEN
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Pearl black / Rose gold
CRI: > 90
Material: Aluminium
Input Voltage: DC48V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable



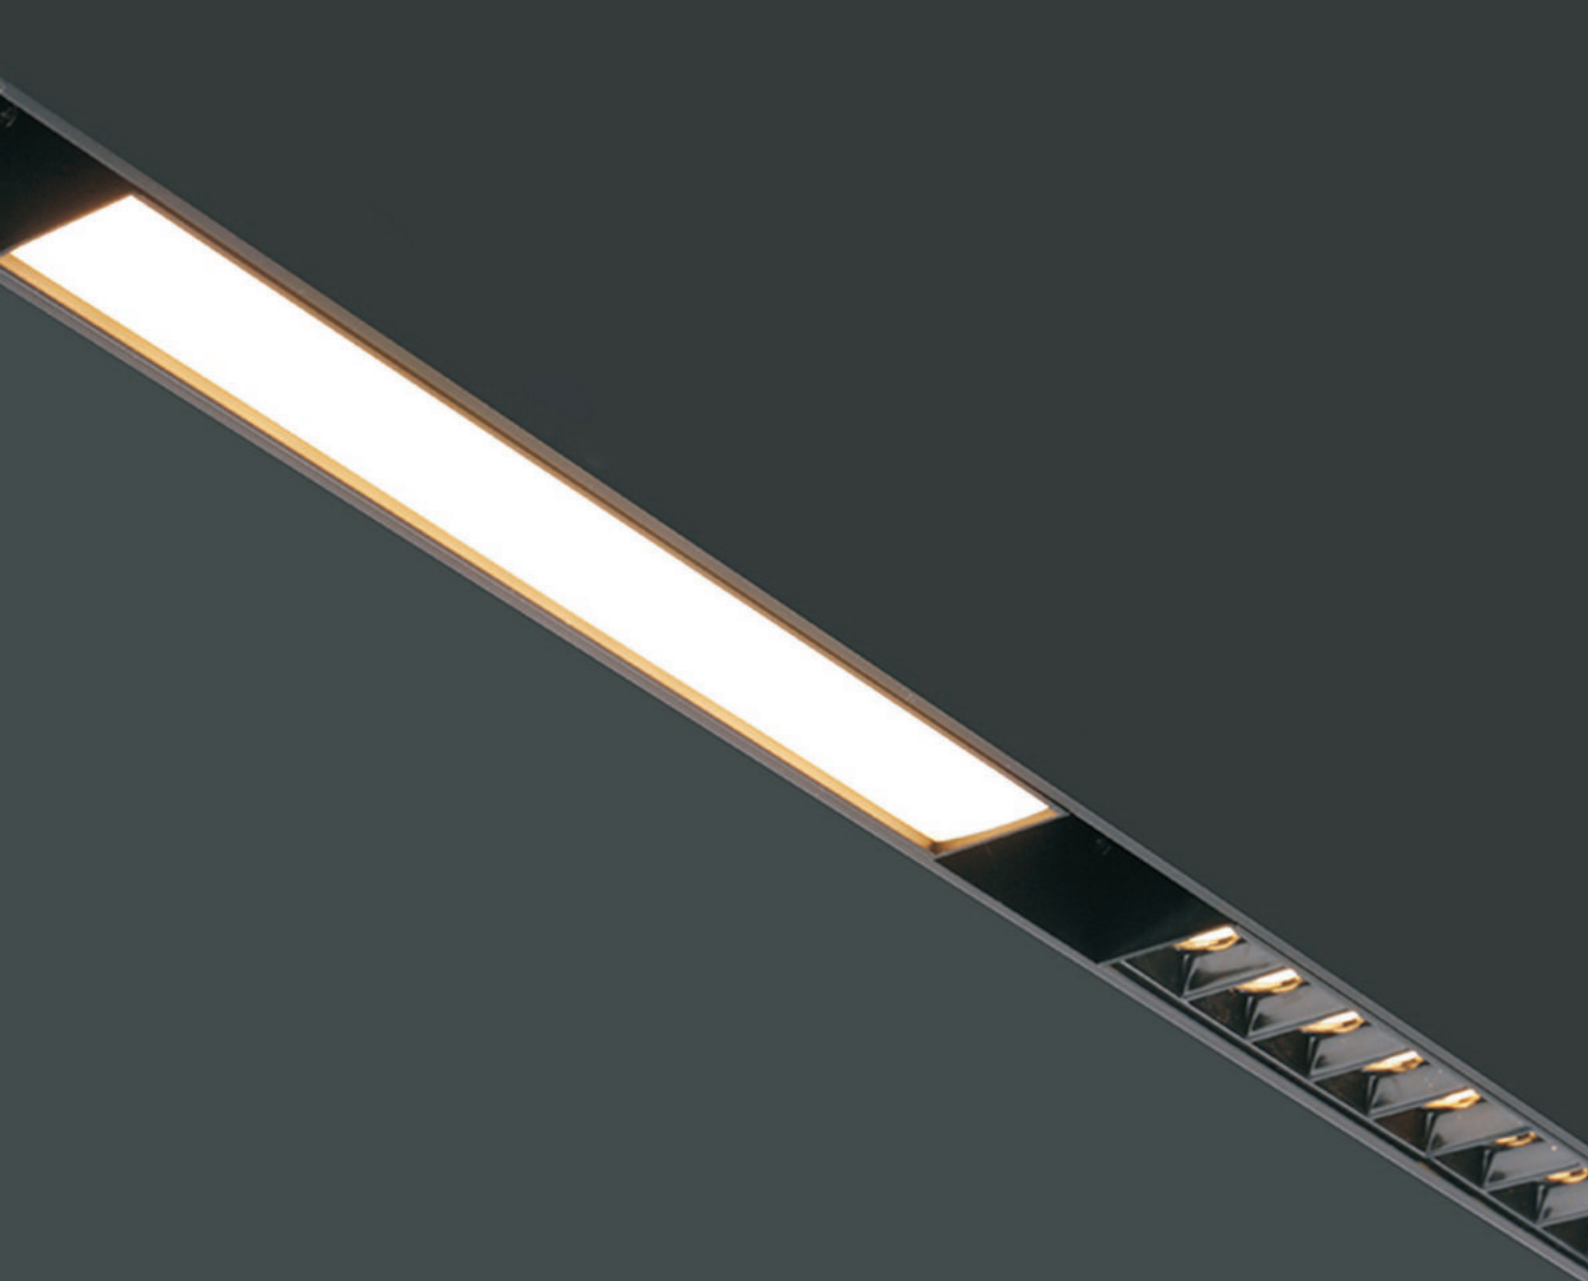

VERSION 3.0 TRACK

Installs Way: Recessed with wings / Recessed
Suspension / Surface mounted

Length: 0.5M / 1M / 1.5M / 2M


Colour: Sand white / Sand black

Material: Aluminum

Output Voltage: 24VDC


Maximum load current: 16A

Track maximum load power: 384W track longest 20m

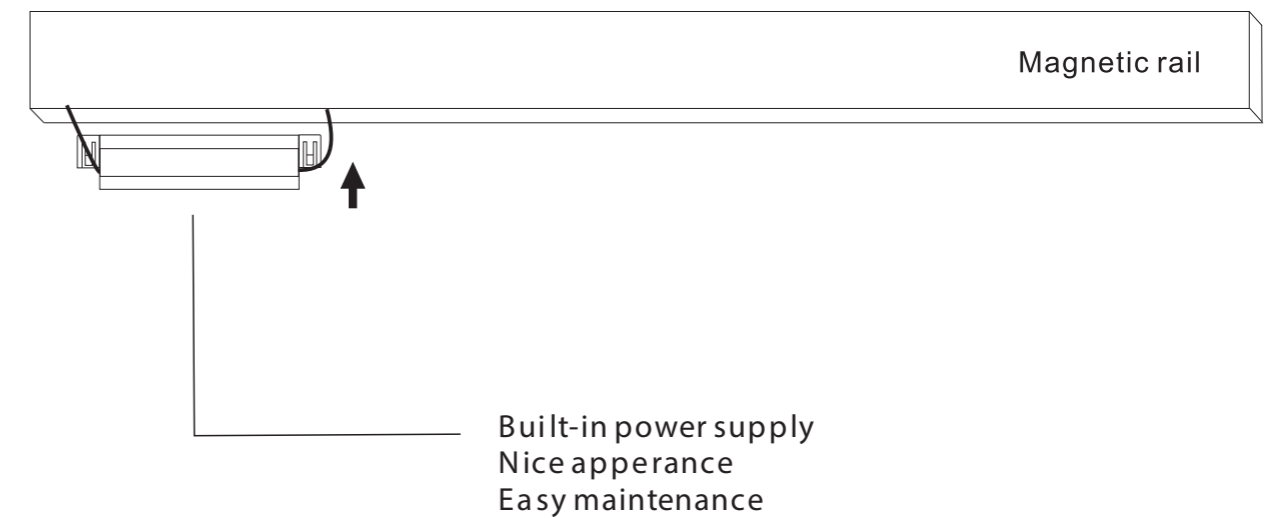




VERSION 3.0 RECESSED TRACK





Recessed without wings



Recessed with wings

PRODUCT INFORMATION

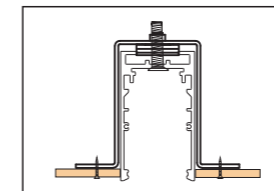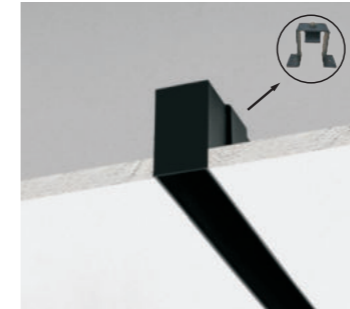


Recessed without wings

Track mode: TL-RC500 / TL-RC1000 / TL-RC1500 / TL-RC2000

Track length: 0.5m / 1.0m / 1.5m / 2.0m

Cut out/mm: 510x50x120 / 1010x50x120 / 1510x50x120 / 2010x50x120

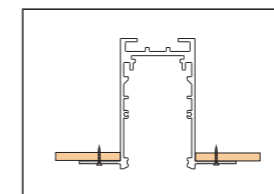

Recessed with wings

Track mode: TL-RC500S / TL-RC1000S / TL-RC1500S / TL-RC2000S


Track length: 0.5m / 1.0m / 1.5m / 2.0m

Cut out/mm: 510x50x90 / 1010x50x90 / 1510x50x90 / 2010x50x90

ACCESSORIES




Model: TL-TC9001A
Trimless track horizontal L connector



Model: TL-TC9006A
Trimless track cross connector




Model: TL-TC9007A
Trimless track T connector




Model: TL-TC9002A
Track vertical T connector




Model: TL-RC01
Recessed kit



Model: TL-TC9003A
Recessed track horizontal L connector with wings




Model: TL-TC9004A
Recessed track cross connector with wings



Model: TL-TC9005A
Recessed track T connector with wings




Model: TL-PL07
Straight track connector




Model: TL-PL08
T type connector



VERSION 3.0 PENDENT TRACK





Suspension wires type



Suspension rob type

PRODUCT INFORMATION

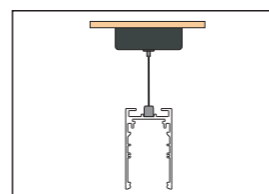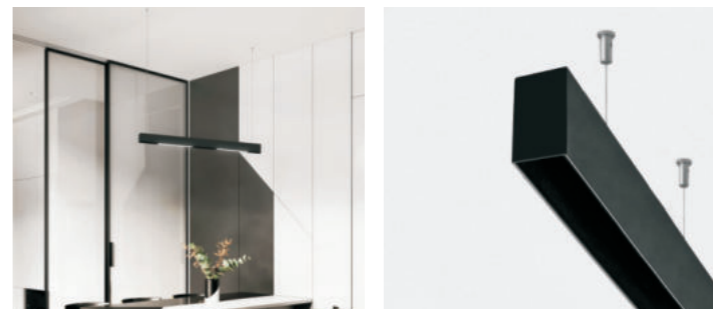


Pendent

Track mode: TL-SP500 / TL-SP 1000 / TL-SP1500 / TL-SP2000
Track length: 0.5m / 1.0m / 1.5m / 2.0m

ACCESSORIES




Model: TL-TC9001A
Trimless track horizontal L connector



Model: TL-TC9006A
Trimless track cross connector



Model: TL-TC9007A
Trimless track T connector



Model: TL-TC9002A
Track vertical T connector




Model: TL-MS01
Suspension wires



Model: TL-MS02-06
Suspension rob



Model: TL-PL07
Straight track connector




Model: TL-PL08
T type connector




**VERSION 3.0 SURFACE
MOUNTED TRACK**

PRODUCT INFORMATION

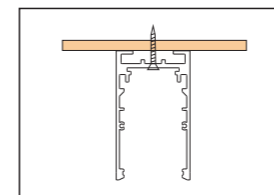

Surface mounted
Track mode: TL-SM500 / TL-SM1000 / TL-SM1500 / TL-SM2000
Track length: 0.5m / 1.0m / 1.5m / 2.0m

ACCESSORIES

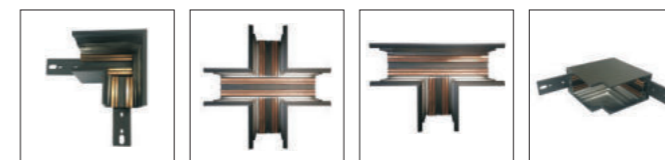



Model: TL-TC9001A Trimless track horizontal L connector
Model: TL-TC9006A Trimless track cross connector
Model: TL-TC9007A Trimless track T connector
Model: TL-TC9002A Track vertical T connector





Model: TL-PL07 Straight track connector
Model: TL-PL08 T type connector



**VERSION 3.0 MAGNETIC TRACK
LINEAR LIGHT SERIES**



PRODUCT INFORMATION




Item NO.: TL-MLL300
Power: 10W
Luminous Flux: 780 lm
Size (mm): L 280*W35*H59


Item NO.: TL-MLL640
Power: 20W
Luminous Flux: 1600 lm
Size (mm): L 652*W35*H59

Item NO.: TL-MLL960
Power: 30W
Luminous Flux: 2400 lm
Size (mm): L 970*W35*H59


Beam Angle: 110°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC24V
Dim: 0-10V/ Wi-Fi/Dali Dimmable

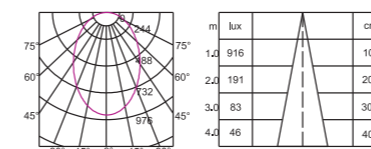


TL-MLL300 10W 3000K CRI>90 110°

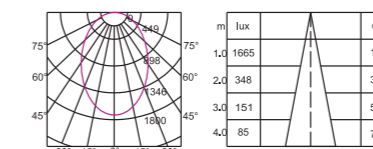


TL-MLL300 10W 4000K CRI>90 110°

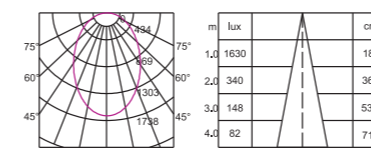


TL-MLL640 20W 3000K CRI>90 110°

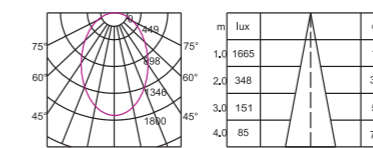

TL-MLL640 20W 4000K CRI>90 110°

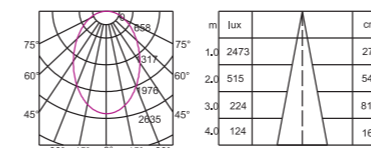

TL-MLL960 30W 3000K CRI>90 110°

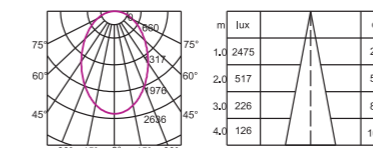


TL-MLL960 30W 4000K CRI>90 110°



**VERSION 3.0 MAGNETIC TRACK
LINEAR SPOTLIGHT SERIES**



PRODUCT INFORMATION




Item NO. : TL-MLS01
 Power: 1W/2W
 Luminous Flux: 80lm/160lm
 Size(mm): L 45*W35*H59

Item NO. : TL-MLS03
 Power: 3W/6W
 Luminous Flux: 245lm/495lm
 Size(mm): L 106*W35*H59


Item NO. : TL-MLS05
 Power: 5W/10W
 Luminous Flux: 410lm/820lm
 Size(mm): L 148*W35*H59

Item NO. : TL-MLS10
 Power: 10W/20W
 Luminous Flux: 815lm/1590lm
 Size(mm): L 280*W35*H59


Beam Angle: 15°/ 30°/ 45°
 Light Source: OSRAM SMD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white/Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC24V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable

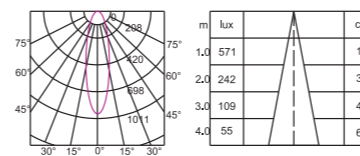


TL-MLS01 1W 3000K CRI>90 30°

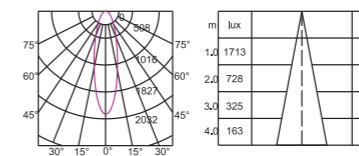

TL-MLS03 3W 3000K CRI>90 30°

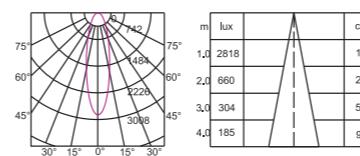

TL-MLS05 5W 3000K CRI>90 30°

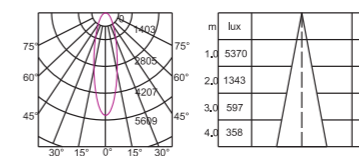

TL-MLS10 10W 3000K CRI>90 30°

NEW



**VERSION 3.0 MAGNETIC TRACK
SQUARE SPOTLIGHT SERIES**



PRODUCT INFORMATION



Square(S)



Rectangle(R)



Item NO. : TL-MLS0505S / TL-MLS0510S
Power: 5W/10W
Luminous Flux: 390lm / 785lm
Size(mm): L 148*W35*H59

Beam Angle: 40°/40°/70°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: S and white/S and black
CRI: > 90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable



Item NO. : TL-MLS0505R / TL-MLS0510R
Power: 5W/10W
Luminous Flux: 391lm/782lm
Size(mm): L 148*W35*H59



Item NO. : TL-MLS1010S / TL-MLS1020S
Power: 10W/20W
Luminous Flux: 785lm/1560lm
Size: L 280*W35*H59



Item NO. : TL-MLS1010R / TL-MLS1020R
Power: 10W/20W
Luminous Flux: 788lm/1565lm
Size(mm): L 280*W35*H59


NEW



**VERSION 3.0 MAGNETIC TRACK
LINEAR SPOTLIGHT SERIES**



PRODUCT INFORMATION

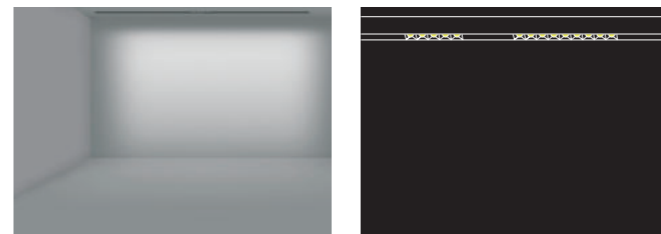

Item NO. : TL-MLS0505W/TL-MLS0510W
 Power: 5W/10W
 Luminous Flux: 360lm/715lm
 Size(mm): L 148*W35*H59


Beam Angle: Wall washer
 Light Source: OSRAM SMD
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white/Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC24V
 Dim: 0 - 10V/Wi- Fi/Dali Dimmable

Item NO. : TL-MLS1010W/TL-MLS1020W
 Power: 10W/20W
 Luminous Flux : 710lm/1430lm
 Size(mm): L280*W35*H59






**VERSION 3.0 MAGNETIC TRACK
WALL WASHER LIGHT SERIES**

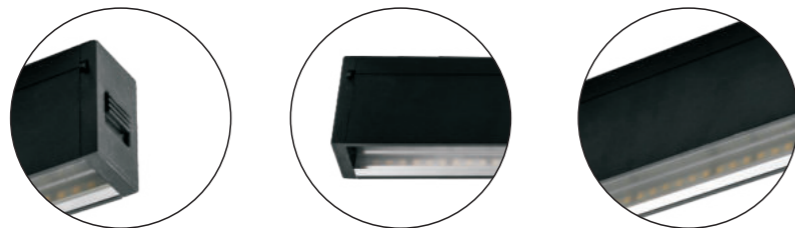

PRODUCT INFORMATION



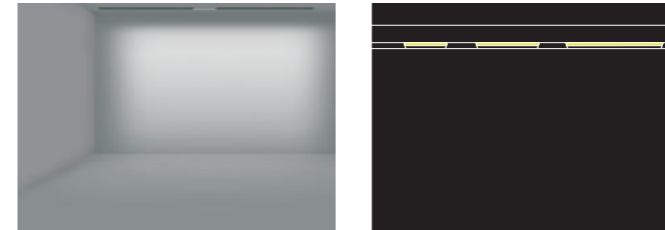


Item NO. : TL-MW300
Power: 10W
Luminous Flux: 680lm
Size(mm): L280*W35*H59

Item NO. : TL-MW640
Power: 20W
Luminous Flux: 1380lm
Size(mm): L 652*W35*H59

Item NO. : TL-MW960
Power: 30W
Luminous Flux: 2050lm
Size(mm): L 970*W35*H59

Beam Angle: Partial flooding angle 90°
Light Source: OSRAM SMD
Colour Temperature : 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: >90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable

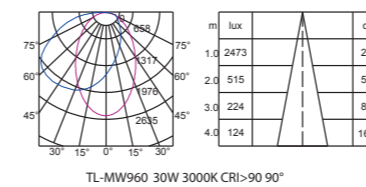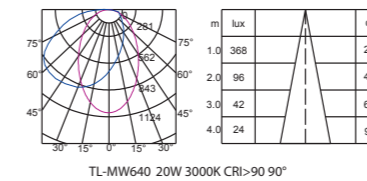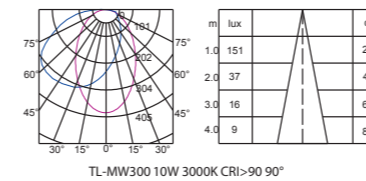




**VERSION 3.0 MAGNETIC TRACK
GIMBAL LINEAR LIGHT SERIES**




PRODUCT INFORMATION

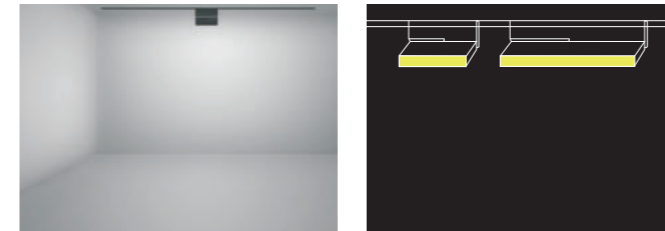


Item NO. : TL-MGL300
Power: 10W
Luminous Flux: 790lm
Size (mm): L270*W35*H180


Beam Angle: 110°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/ DALI Dimmable




Item NO. : TL-MGL640
Power: 20W
Luminous Flux: 1605lm
Size (mm): L640*W35*H180

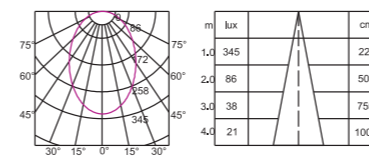


TL-MGL300 10W 3000K CRI>90 110°

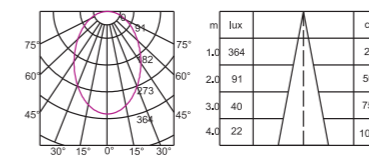

TL-MGL300 10W 4000K CRI>90 110°

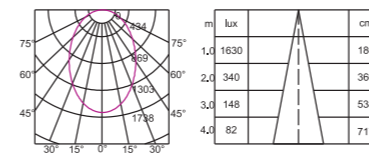


TL-MGL640 20W 3000K CRI>90 110°

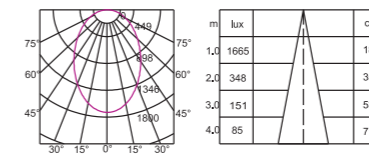


TL-MGL640 20W 4000K CRI>90 110°



**VERSION 3.0 MAGNETIC TRACK
GIMBAL SPOTLIGHT SERIES**

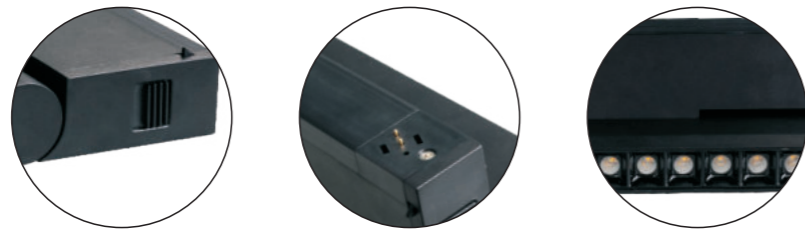

PRODUCT INFORMATION

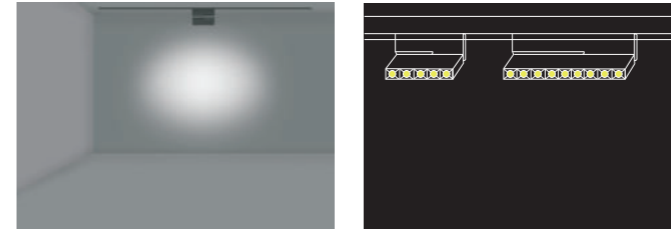

Item NO. : TL-MGS03
Power: 3W/6W
Luminous Flux : 245lm/503lm
Size(mm): L 94*W35*H180


Beam Angle: 15°/ 30°/ 45°
Light Source: OSRAM SMD
Colour Temprature: 2 700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable




Item NO. : TL-MGS05
Power: 5W/10W
Luminous Flux: 410lm/822lm
Size(mm): L 137*W35*H180




Item NO. : TL-MGS10
Power: 10W/20W
Luminous Flux: 810lm/1630lm
Size(mm): L 270*W35*H180

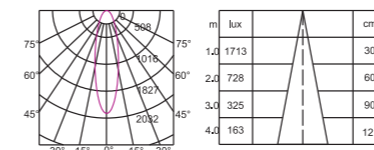

TL-MLS03 3W 3000K CRI>90 30°

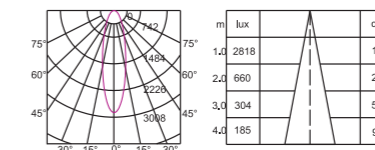

TL-MLS05 5W 3000K CRI>90 30°

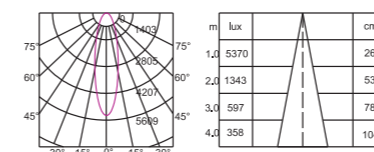


TL-MLS10 10W 3000K CRI>90 30°

NEW




**VERSION 3.0 MAGNETIC TRACK
GIMBAL SQUARE SPOTLIGHT SERIES**

PRODUCT INFORMATION



Rectangle(R)



Square(S)



Item NO.: TL-MLS0505S/ TL-MLS0510S
Power: 5W/10W
Luminous Flux: 395lm/795lm
Size(mm): L 137*W35*H180

Beam Angle: 40°/40°/70°
Light Source: OSRAM SMD
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white/Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable

Item NO.: TL-MLS0505R/ TL-MLS0510R
Power: 5W/10W
Luminous Flux: 396lm/792lm
Size(mm): L 137*W35*H180



Item NO.: TL-MLS1010S/ TL-MLS1020S
Power: 10W/20W
Luminous Flux: 780lm/1550lm
Size(mm): L 270*W35*H180

Item NO.: TL-MLS1010R / TL-MLS1020R
Power: 10W/20W
Luminous Flux: 775lm/1540lm
Size(mm): L 270*W35*H180



**VERSION 3.0 MAGNETIC TRACK
SPOTLIGHT SERIES**




PRODUCT INFORMATION




Item NO. : TL-MS55
 Power: 8W/15W
 Luminous Flux: 630lm/1150lm
 Size (mm): L105*D55*H166
 L170*D55*H166

Beam Angle : 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: D C 24V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable

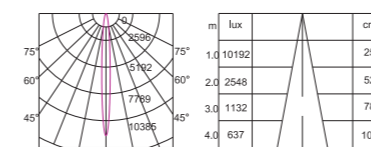

TL-MS55 15W 3000K CRI>90 15°

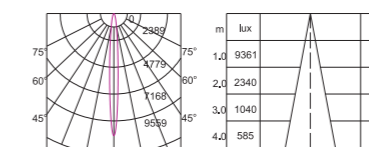


TL-MS55 15W 4000K CRI>90 15°



**VERSION 3.0 MAGNETIC TRACK
SPOTLIGHT SERIES**




PRODUCT INFORMATION

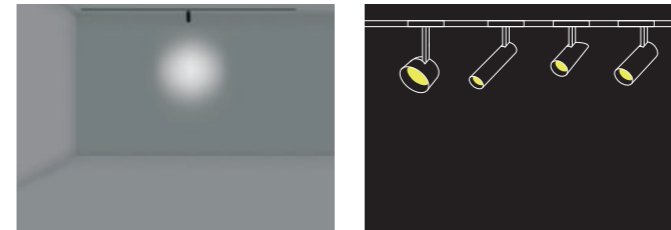


Item NO. : TL-MS54
Power: 15W
Luminous Flux: 1200lm
Size(mm): L125*D71*H172

Beam Angle: 15°/ 24°/ 36°
Light Source: CITIZEN
Colour Temperature: 2700K/3000K/4000K/5000K
Colour: Sand white / Sand black
CRI: > 90
Material: Aluminium
Input Voltage: DC 24V
Dim: 0 - 10V/Wi-Fi/Dali Dimmable

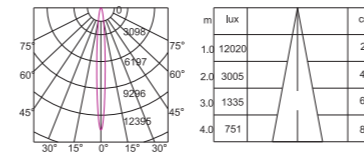

TL-MS54 15W 3000K CRI>90 15°

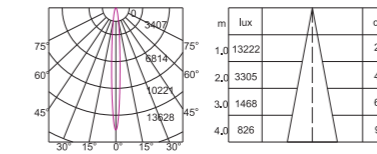


TL-MS54 15W 4000K CRI>90 15°



**VERSION 3.0 MAGNETIC TRACK
SPOTLIGHT SERIES**




PRODUCT INFORMATION

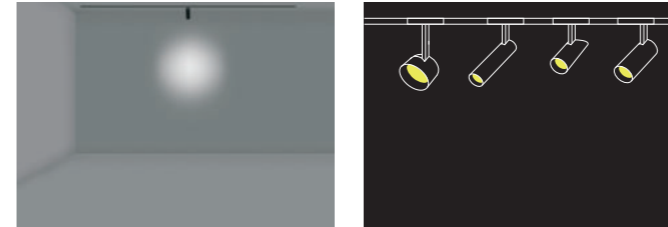


Item NO. : TL-MS76
 Power: 15W /20W/25W
 Luminous Flux: 1210lm /1700lm/2150lm
 Size(mm): L144*D76*H188

Beam Angle: 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: D C 24V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable

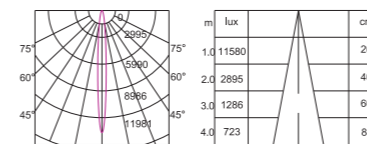

TL-MS76 15W 3000K CRI>90 15°

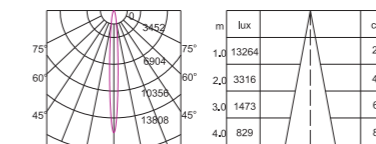



TL-MS76 15W 4000K CRI>90 15°



**VERSION 3.0 MAGNETIC TRACK
SPOTLIGHT SERIES**




PRODUCT INFORMATION




Item NO. : TL-MS112
 Power: 15W/20W/25W
 Luminous Flux: 1205lm/1650lm/2200lm
 Size(mm): L66* D105*H280

Beam Angle: 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC24V
 Dim: 0 - 10V/Wi - Fi/Dali Dimmable

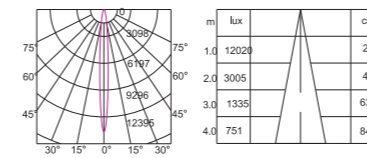

TL-MS112 15W 3000K CRI>90 15°

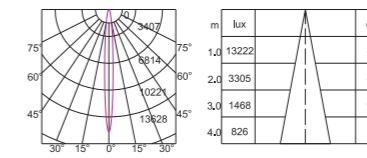


TL-MS112 15W 4000K CRI>90 15°



**VERSION 3.0 MAGNETIC TRACK
SUSPENDED LIGHT SERIES**




PRODUCT INFORMATION

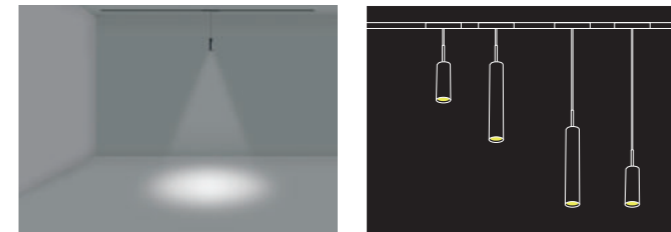


Item NO. : TL-MP55
 Power: 8W/15W
 Luminous Flux: 620lm/1205lm
 Size(mm): L300*D55


Beam Angle: 15°/ 24°/ 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K/3000K/4000K/5000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 24V
 Dim: 0 - 10V/Wi-Fi/Dali Dimmable

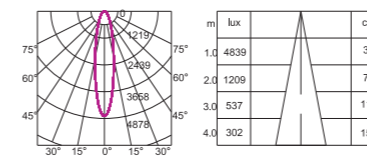


TL-MP55 15W 3000K CRI>90 24°

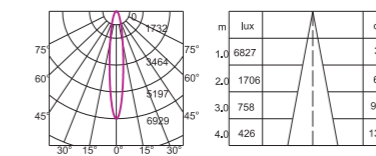

TL-MP55 15W 4000K CRI>90 24°

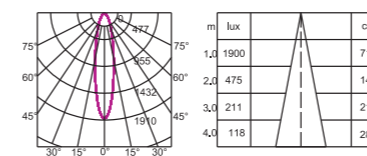


TL-MP55 15W 3000K CRI>90 36°

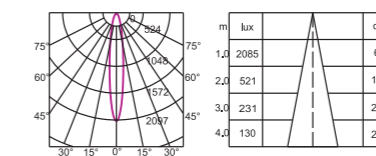



TL-MP55 15W 4000K CRI>90 36°

INSTALLATION DIAGRAM OF VERSION 3 MAGNETIC RAIL

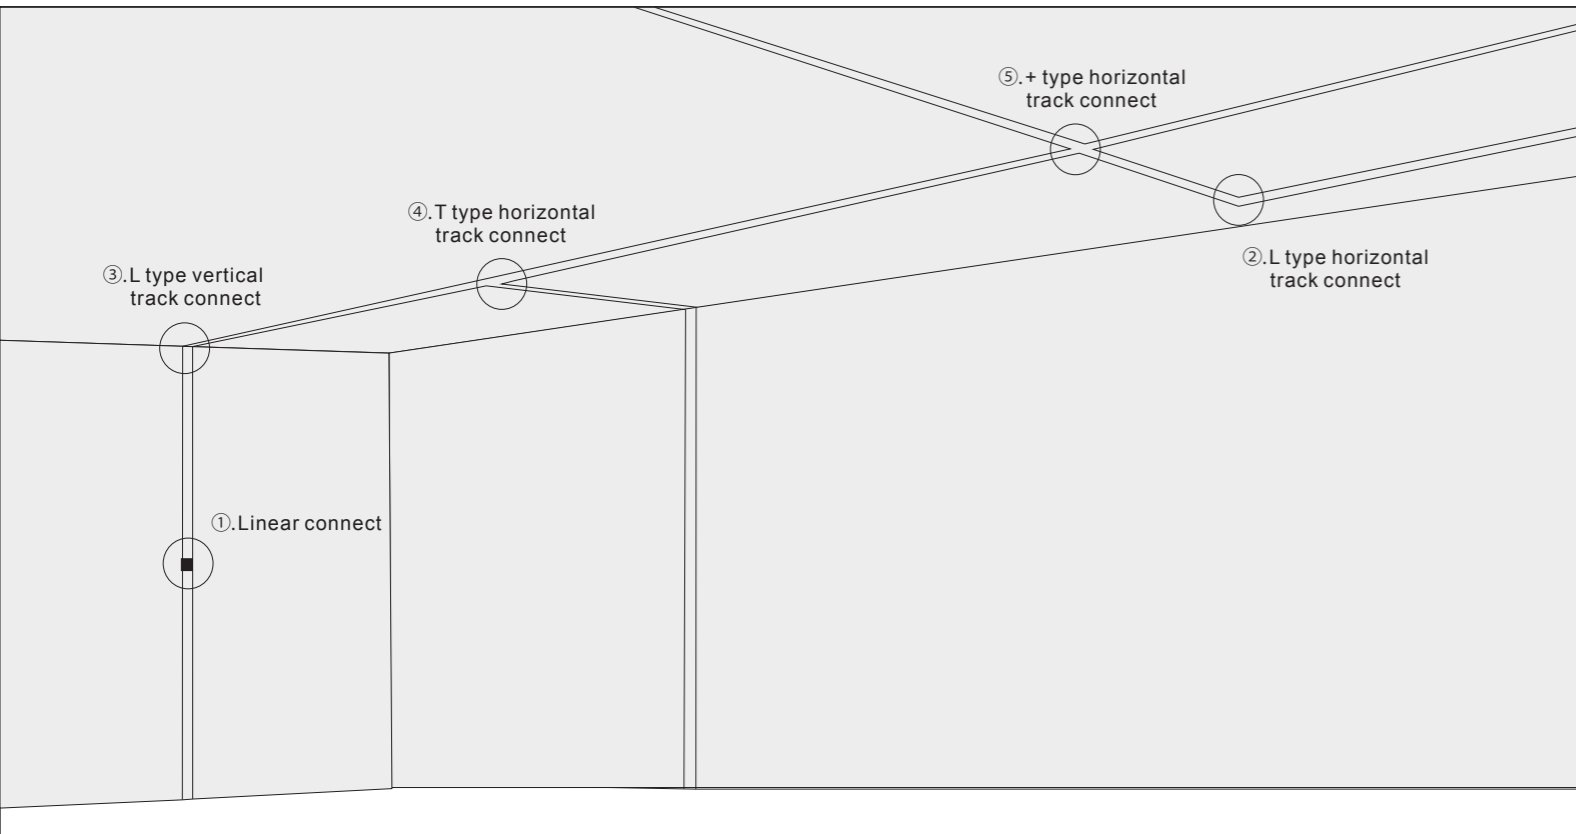


INSTALLATION DIAGRAM OF VERSION 4 MAGNETIC RAIL

Rail connection of surface-mounted installation and suspended installation

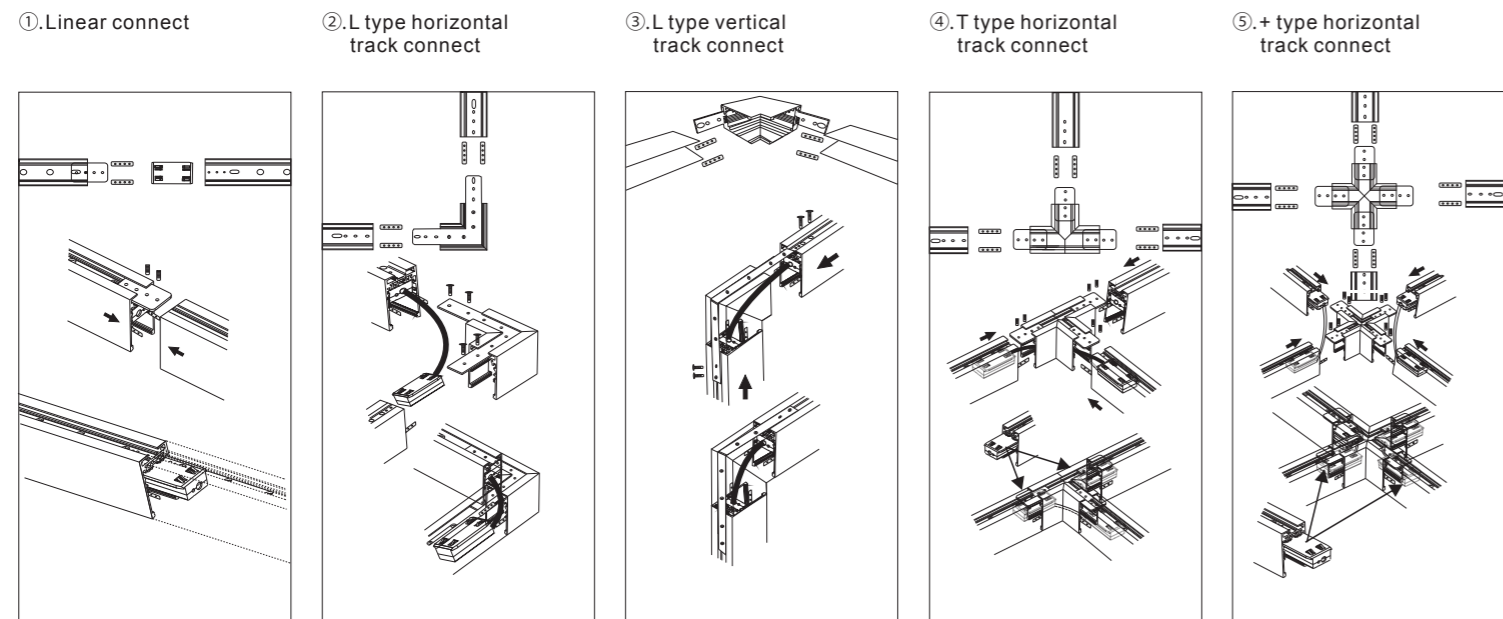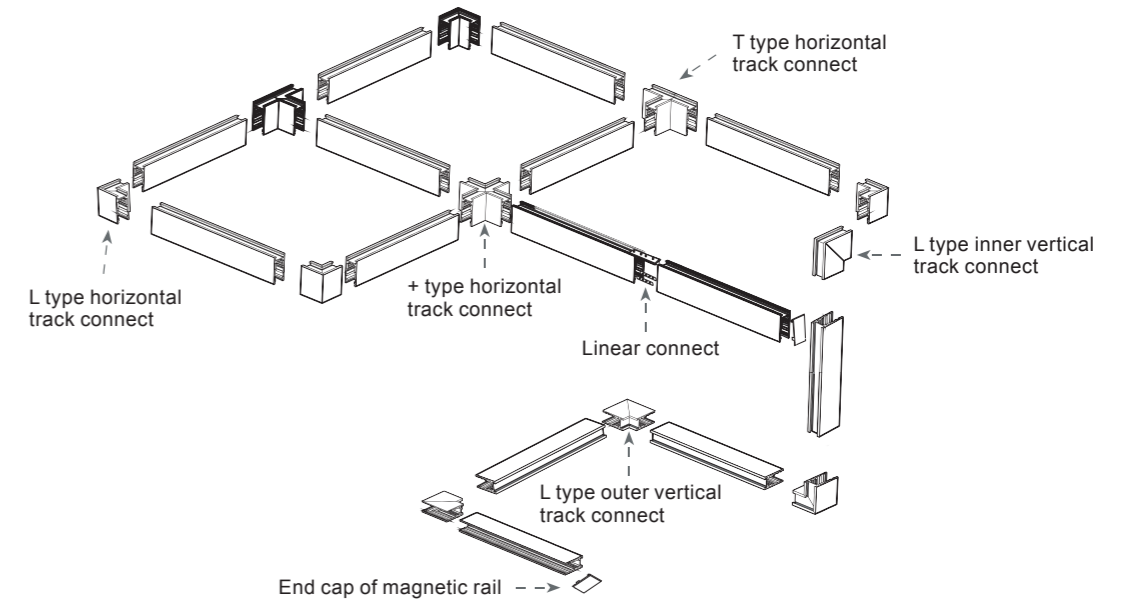

Rail connection of recessed installation

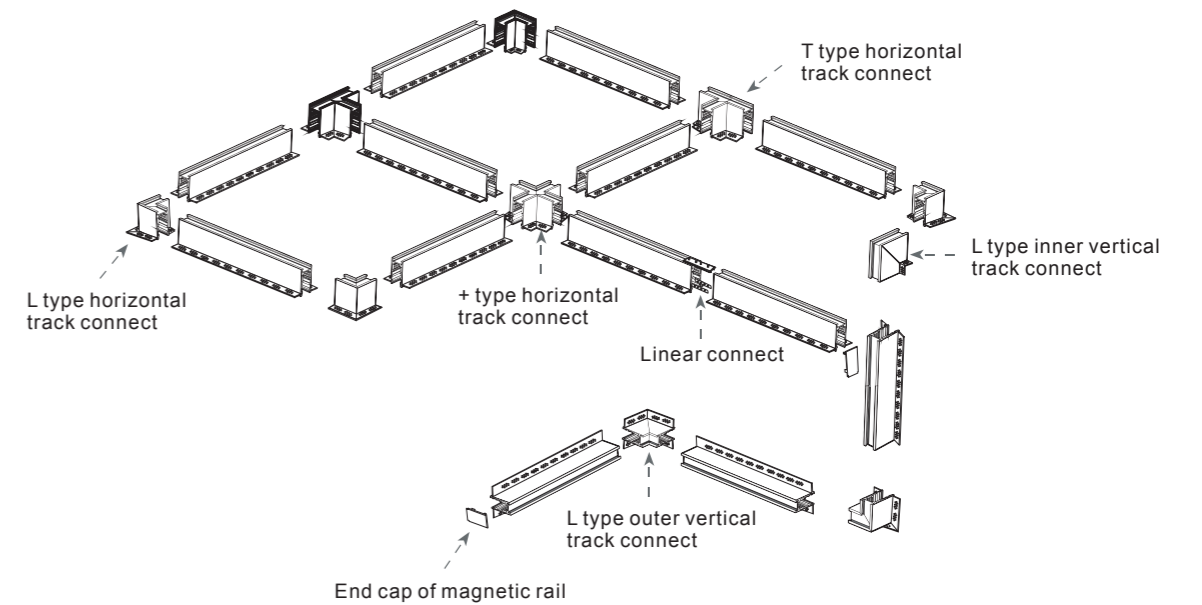



OFFICES

EUROPE

T-Luce Italia srl
Viale Giacomo Matteotti 15, Firenze 50121, Italy

europa@t-luce.com
+39 3281425503

MIDDLE EAST

Tecno Hub 2, 2nd floor Office 212,
Dubai, Silicon Oasis (UAE)

middleeast@t-luce.com
+971 42328303

ASIA

2263 Pasong Tamo Extension,
Magallanes, Makati City

asia@t-luce.com
+632 8893 2403